

## TECHNICAL DATA SHEET

AML-AC IP44 / Xenon

VERSION - 26.04.2016


### STANDARD LUMINAIRE

Reference	AML-AC			
Protection Class	IP44			
Lighting Source	Xenon			
Connector	Rigid Loop on B'Light conductor 16mm <sup>2</sup>			
Dimensions	120 x 60mm			
Standard Length	610 - 910 - 1210 - 1510mm			
Length on measure	on request up to 2965mm			
Nb Lighting Unit	17 bulbs/m			
Voltage	24V			
Power	3W	5W	8.5W	10W
	51 W/m	85 W/m	144.5 W/m	170 W/m
Connecting Cable	1m standard cable 2x2.5mm <sup>2</sup>			
Reflector	RI			
Fixation	FIX			
End Caps	ARL + EFA			

### APPLICATION: miroirs, walls



### AML-AC / XENON - Rigid Loop

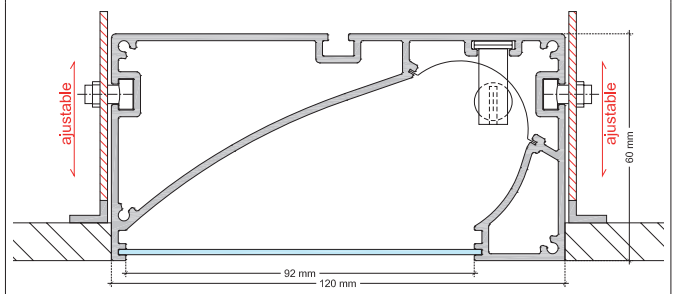

### FINISH

#### Color Finishing Profil

Standard	Natural Anodised Aluminium
On request	Thermo-Enameling Powder Coating RAL Color Anodising Polished Aluminium Chrome Aspect Polished Aluminium Old Gold Aspect Plywood


#### Glass Finishing

Standard	VER: Opaline Glass
On request	VERC: Clear Glass

### ON REQUEST

Connecting Plug	AMS / AF
Dimming Option	Phase 220V, Dali, KNX <i>Ask technical departement for more information</i>

### FIXATION : FIX



### ON REQUEST : Connecting plug AMS/AF



### LIGHTING SOURCE

Lighting Source	Xenon Long Life			
Glass	Clear or Frosted			
Power	3W	5W	8.5W	10W
Voltage	24V	24V	24V	24V
Beam Angle	360°	360°	360°	360°
Color Temperature	2300K	2400K	2600K	2500K
Light Output lm/unit	12.6lm	40lm	95lm	90lm
Lifetime	20'000h	20'000h	10'000h	20'000h

### CERTIFICAT



### AGABEKOV



AGABEKOV SA Manufacture 6, ROUTE DE COMPOIS  
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND  
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08  
E - mail: info@agabekov.com



AGABEKOV SA Bureau d'etudes 6, ROUTE DE COMPOIS  
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND  
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08  
Internet: www.agabekov.com

