

TECHNICAL DATA SHEET

LASYTSAL IP65 / Aga-Led® Type A

VERSION - 06.05.2016

STANDARD LUMINAIRE

Reference	LASYTSAL
Protection Class	IP65 - Tube IP68
Lighting Source	Aga-Led® Type A
Connector	Festoon on B'Light conductor 16mm ²
Dimensions	120 x 82mm
Standard Length	200 - 530 - 1025 - 1520 - 2015mm
Length on measure	on request up to 2015mm
Nb Lighting Unit	15 LED/m
Voltage	24V
Power	15 W/m
Connecting Cable	One Side: 1m cable PUR 2x2.5mm ²

FINISH

Color Finishing Profil

Standard	Black Powder Coating
On request	Thermo-enamelling Powder Coating RAL Color Anodising

Glass Finishing

Standard	Clear
On request	Opaline

ON REQUEST

Fixation	LASY BOX
Connecting Plug	AMS / AF or AMS-E / AF-E
Dimming Option	1-10V, Dali, KNX <i>Ask technical departement for more information</i>

LIGHTING SOURCE

Lighting Source	Aga-Led® Type A
Ref	A10
Voltage	24V
Power	1W
Beam Angle	15°
CRI	80
Lifetime	60'000h
Working T°	-30°C ~ +55°C
Option	AGC: Anti Glare Optic




Color Temperature & Luminous Flux / Unit

CCT	2800K	4000K
Luminous Flux/Unit	40 lm	45 lm


CERTIFICAT



APPLICATION: walls, recessed ground, passageways

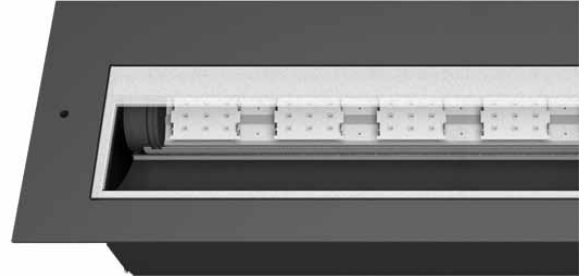


LASYTSAL / AGA--LED® TYPE A - Festoon

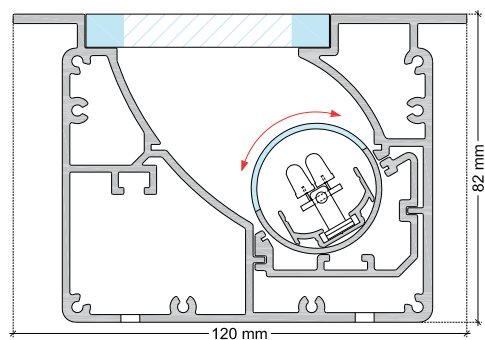


ADVISED INSTALLATION FOR UNIFORM LIGHT OUTPUT

CLEAR GLASS

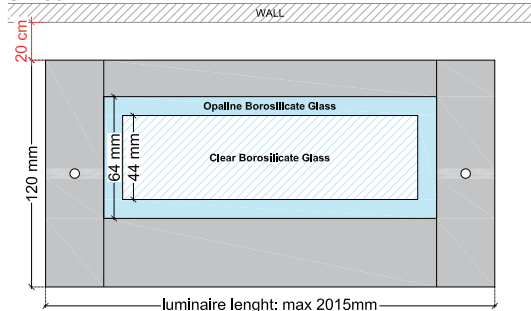

OPALINE GLASS

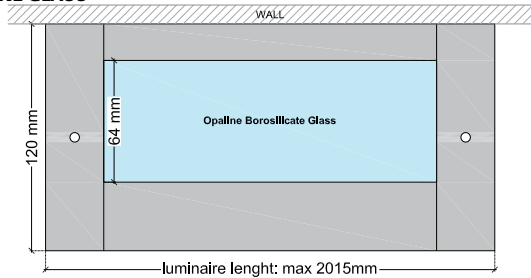

On Request: Connecting Plug

AF/AMS



AF-E/AMS-E (IP68)

