

TECHNICAL DATA SHEET

LT2AL IP20 / Aga-Led® Type B


VERSION - 13.12.2016

STANDARD LUMINAIRE

Reference	LT2AL
Protection Class	IP20
Lighting Source	Aga-Led® Type B
Connector	Rigid Loop on B'Light conductor 16mm ²
Dimensions	ø33 x 28mm
Standard Length	330 - 670 - 1000 - 1330 - 1670 - 2000 - 2330mm
Length on measure	on request up to 2990mm
Nb Lighting Unit	18 LED/m
Voltage	24V
Power	17.28 W/m to 21.6 W/m
Connecting Cable	1m standard cable 2x1.5mm ²



LT2AL - AGA-LED® TYPE B



FINISH

Color Finishing Profil

Standard	Natural Anodised Aluminium
On request	Thermo-Enameling Powder Coating RAL Color Anodising Polished Aluminium Chrome Aspect Polished Aluminium Gold Aspect Plywood

ON REQUEST

Fixation	RBA or RBS
Cover or Grid	VFC: Clear Glass VFO: Opaline Glass GRPR (Grid not possible with Aga-Led® B3)
End Caps	EPR - EPR190
Connecting Plug	AMS / AF
Dimming Option	1-10V, Dali, KNX <i>Ask technical departement for more information</i>

LIGHTING SOURCE

Lighting Source	Aga-Led® Type B - Generation 2	
Ref	B3	B6
Power	0.96W	1.2W
Voltage	24V	24V
Beam Angle	120°	120°
CRI	80	80
Lifetime	50'000h	
Working T°	-20°C to +45°C	
Environmental protection	Modified acrylate resin	

Color Temperature & Luminous Flux / Unit


	2200K	2400K	2700K	3000K	4000K
Aga-Led® B3-G2	--	97 lm	137lm	137lm	137lm
Aga-Led® B6-G2	129 lm	140 lm	166 lm	166 lm	166 lm

CERTIFICAT





ON REQUEST: LT2AL COVER OR GRID

Cover: VFC (or VFO)




Grid: GRPR




ON REQUEST : LT2AL FIXATION

FIXATION RBA

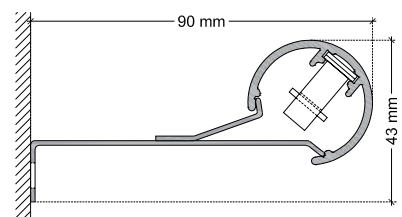

FIXATION RBS

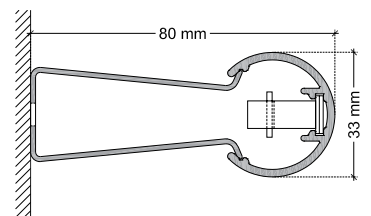

ON REQUEST: LT2AL END CAPS

EPR



EPR190



AGABEKOV



AGABEKOV SA Manufacture 6, ROUTE DE COMPOIS
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08
E - mail: info@agabekov.com



AGABEKOV SA Bureau d'etudes 6, ROUTE DE COMPOIS
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08
Internet: www.agabekov.com

