

TECHNICAL DATA SHEET

LAVTSAL IP20 / Flex Led

VERSION - 30.04.2018

STANDARD LUMINAIRE

Reference	LAVTSAL
Protection Class	IP20
Lighting Source	Flex Advance
Dimensions	340 x 208mm
Standard Length	670 - 1000mm
Length on measure	up to 3000mm
Nb Lighting Source	60 LED/m
Voltage	24V
Power	4.8W/m
Connecting Cable	Both tige : 1m standard cable 2x1.5mm ²
Fixation	2 x (TIGE-8mm + BFTV-8mm)/m + Plexiglass
End Caps	EAV
Anti Glare Visor	VAE

FINISH

Color Finishing Profil

Standard	Natural Anodised Aluminium
On request	Thermo-enameling Powder Coating RAL Color Anodising Polished Aluminium Chrome Aspect Polished Aluminium Old Gold Aspect

ON REQUEST

Fixation	BFTH-8mm ALTR - Power Supply included
Cover	Wood Line
Dimming Option	1-10V, Dali, KNX <i>Ask technical departement for more information</i>

LIGHTING SOURCE

Lighting Source	Flex Led
Voltage	24V
Power	4.8W/m
Nb Led	60 LED/m - LED Pitch: 16.8mm
Beam Angle	120°
CRI	>80
Cut-Out	every 100mm
Lifetime	50'000h or 5 years
Working T°	-30°C to +75°C


Color Temperature & Luminous Flux / Meter

CCT	2700K	3000K	4000K
lm/m	390 lm	390 lm	425 lm


CERTIFICAT



Application: Picture Lighting

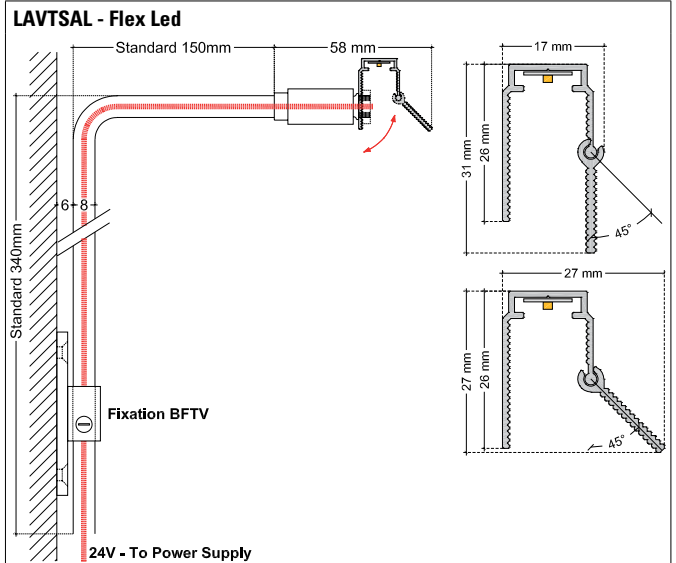

FIXATION - (Detail A)

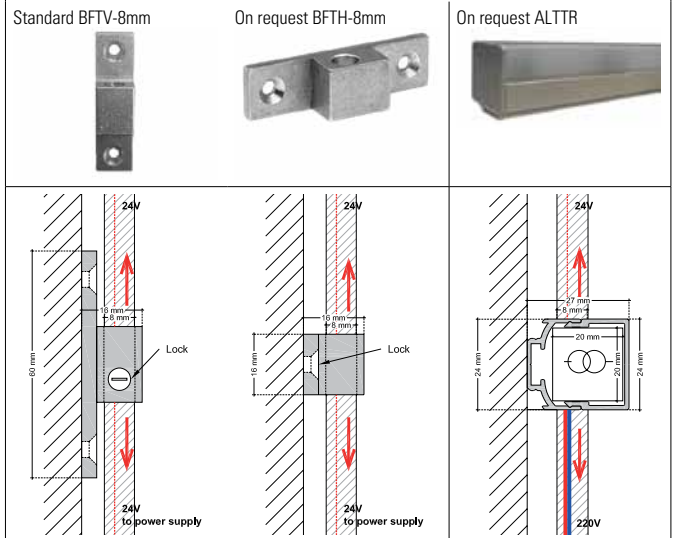

ON REQUEST: COVER - WOOD LINE

